




Enhanced gob loading with new Constant Cone Bézier Delivery

Constant Cone Delivery

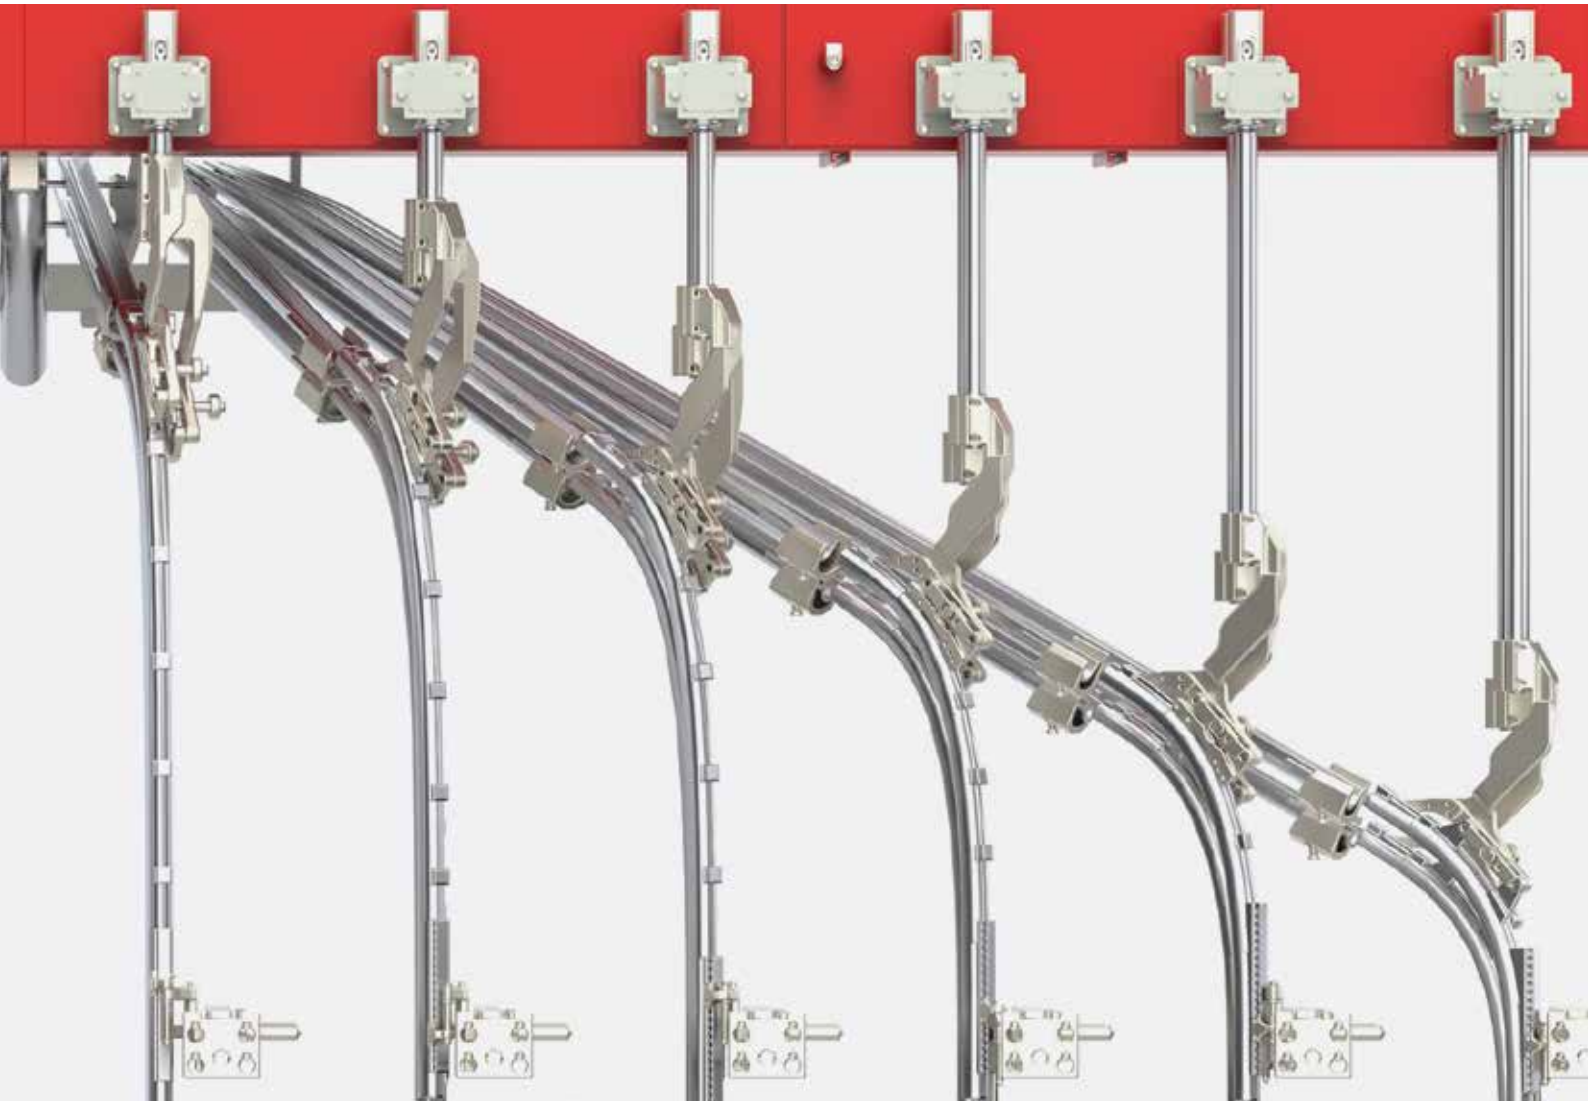


Constant Cone Delivery

Constant cone delivery is the latest Bucher Emhart Glass development for optimal gob loading. The constant cone delivery family is based on a constant trough angle of 28° and covers the full range of forming machines (NIS, BIS, AIS and IS) for all available center distances. The newly developed Bézier equipment, in conjunction with the constant cone geometry, provides for enhanced gob loading.

Optimization criteria are based on:

- Minimizing centripetal accelerations
- Reduce gradually the radial accelerations to zero
- Generate a smooth landing zone
- Increase the length of the deflector profile at the upper end

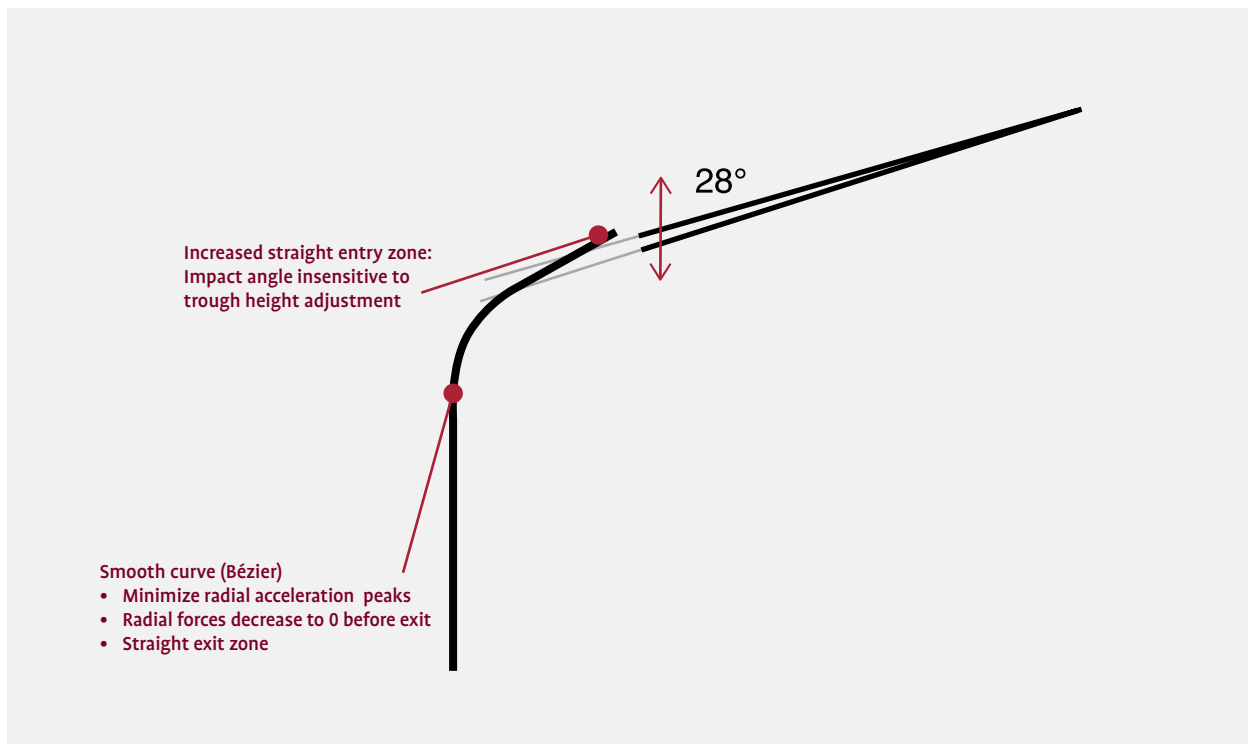

Key benefits of the new Bézier deflectors design

Smaller curvature design

- Reduced gob entry angle variations
- Reduced gob shape variations
- Increased loading stability

Smoother entry curve path

- Reduced impact forces
- Reduced Normal forces
- Increased loading stability
- Longer coating lifetime
- Reduced gob shape variations

Smaller impact and nominal forces

- Less kinematical energy consumption
- Higher loading speed
- Better gob shape


Uniform Normal force distribution on all sections

- Reduced gob speed and gob shape variation from section to section




IS/AIS specification guidelines		IS/AIS 6 section		IS/AIS 8 section		IS/AIS 10 section		IS/AIS 12 section	
Delivery Geometry		Constant Cone		Constant Cone		Constant Cone		Constant Cone	
Equipment		18000	BEZIER	18000	BEZIER	18000	BEZIER	18000	BEZIER
Delivery system		210-2075	210-2150	210-2072	210-2152	210-2069	210-2154	210-2055	210-2156
Suspension	SG	401-1364-4	401-1364-11	401-1183-4	401-1183-15	401-1227-4	401-1227-11	N/A	
Suspension	DG	401-1364-2	401-1364-9	401-1183-2	401-1183-13	401-1227-2	401-1227-9	401-1007-2	401-1007-9
Suspension	TG	401-1364-3	401-1364-10	401-1183-3	401-1183-14	401-1227-3	401-1227-10	401-1007-3	401-1007-10
Suspension	QG	N/A		N/A		N/A		N/A	
Deflector adjustor		210-2051-00		210-2051-00		210-2051-00		210-2051-00	
Trough bracket		401-1182-00		401-1182-00		401-1182-00		401-1101-0	
Delivery equipment		401-1365-00	401-1537-00	401-1222-00	401-1515-00	401-1362-00	401-1525-00	401-1104-00	401-1532-00
Set of troughs	SG	401-1435-00	401-1540-00	401-1435-00	401-1520-00	401-1435-00	401-1528-00	N/A	
Set of troughs	DG	401-1435-00	401-1539-00	401-1435-00	401-1517-00	401-1435-00	401-1527-00	401-1435-00	401-1534-00
Set of troughs	TG								
Set of troughs	QG	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Set of deflectors	SG		401-1541-00		401-1519-00			N/A	N/A
Set of deflectors	DG	401-1366-00		401-1223-00		401-1353-00	401-1526-00		
Set of deflectors	TG		401-1538-00		401-1516-00			401-1106-00	401-1533-00
Set of deflectors	QG	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Comparison of the normal force distribution

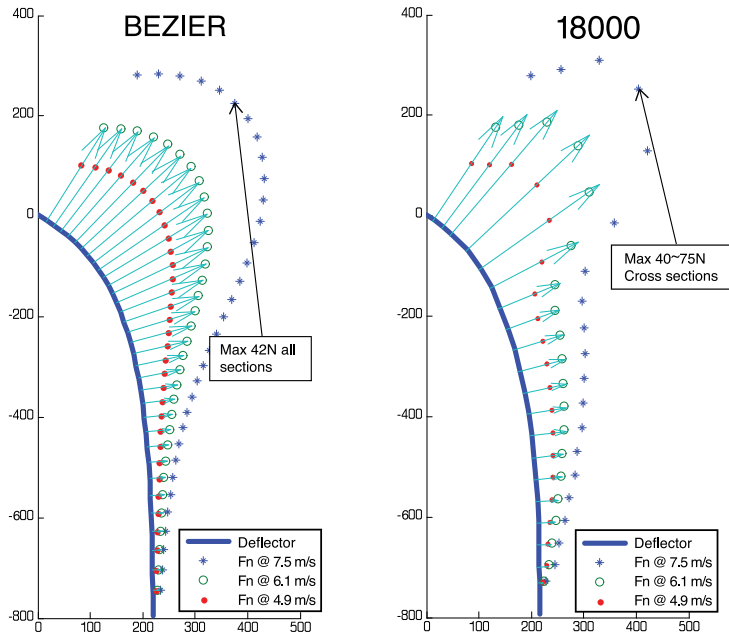

Coating life*

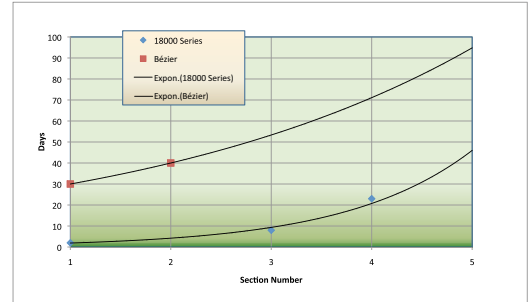

* As measured at Emhart Glass Research Center

NIS specification guidelines

		NIS 8 section		NIS 10 section		NIS 12 section	
Delivery Geometry		Constant Cone		Constant Cone		Constant Cone	
Equipment		18000	BEZIER	18000	BEZIER	18000	BEZIER
Delivery system		400-54-00	400-5403-00	400-53-00	400-5404-00	400-112-00	400-5405-00
Suspension	SG	N/A		N/A		N/A	
Suspension	DG	400-5222-1	400-5222-2	400-5192-1	400-5192-2	400-5147-1	400-5147-2
Suspension	TG	400-5223-1	400-5223-2	400-5193-1	400-5193-2	400-5148-1	400-5148-2
Suspension	QG	400-5224-1	400-5224-2	400-5194-1	400-5194-2	400-5149-1	400-5149-2
Deflector adjustor		400-5087-00		400-5087-00		400-5087-00	
Trough bracket		400-5138-00		400-5138-00		400-5138-00	
Delivery equipment		400-5221-00	400-5408-00	400-5201-00	400-5410-00	400-5146-00	400-5412-00
Set of troughs	SG	N/A	N/A	N/A	N/A	N/A	N/A
Set of troughs	DG	400-5232-00	400-5429-00	400-5202-00	400-5417-00	400-5151-00	400-5423-00
Set of troughs	TG	400-5233-00	400-5430-00	400-5203-00	400-5418-00	400-5152-00	400-5424-00
Set of troughs	QG	400-5234-00	400-5431-00	400-5204-00	400-5419-00	400-5153-00	400-5425-00
Set of deflectors	SG	N/A	N/A	N/A	N/A	N/A	N/A
Set of deflectors	DG	400-5242-00	400-5426-00	400-5212-00	400-5414-00	400-5154-00	400-5420-00
Set of deflectors	TG	400-5243-00	400-5427-00	400-5213-00	400-5415-00	400-5155-00	400-5421-00
Set of deflectors	QG	400-5244-00	400-5428-00	400-5214-00	400-5416-00	400-5156-00	400-5422-00

Upgrade

The extension of the deflector upper end optimizes the landing zone and minimizes the impact forces. When using Bézier deflectors, shorter troughs are needed resulting in improved thermal behavior.

All the existing constant cone delivery can be upgraded to Bézier geometry by replacing deflectors, troughs and suspension forks.

Upgrades of a previous non-constant cone machine are possible by replacing the machine top beam and the related spacers. The retrofit will result in a machine height increase.

Increase of machine height with new constant cone delivery

Machine	Top of beam DG/TG	Top of funnel air ride DG/TG	Top of interceptor DG/TG
6 Section IS 4-1/4	412	372/428	372/416
6 Section IS 5"	285	245/301	259/289
8 Section IS 4-1/4	393	353/409	353/397
8 Section IS 5"	266	226/282	226/270
10 Section IS 4-1/4	278	238/319	238/307
10 Section IS 5"	278	238/319	238/307
12 Section IS 4-1/4	205	164/-	165/-
12 Section IS 5"	205	164/245	165/233
6-Section IS 5-1/2	348	308/-	308/-
6-Section AIS 6-1/4"	348	308/-	308/-
8-Section IS 5-1/2	410	369/-	370/-
8-Section AIS 6-1/4"	409/384	368/400	369/388
10-Section IS 5-1/2	320	280/-	280/-
10-Section AIS 6-1/4"	320	280/314	280/302
12-Section IS 5-1/2	208	167/-	168/-
12-Section AIS 6-1/4"	208/143	167/184	168/171

BIS specification guidelines

		BIS 8 section		BIS 10 section		BIS 12 section	
Delivery Geometry		Constant Cone		Constant Cone		Constant Cone	
Equipment		18000	BEZIER	18000	BEZIER	18000	BEZIER
Delivery system		401-1507-1	401-1507-2	401-1509-1	401-1509-2	401-1511-1	401-1511-2
Suspension	SG	N/A		N/A		N/A	
Suspension	DG	401-1183-2	401-1183-13	401-1227-2	401-1227-9	401-1007-2	401-1007-9
Suspension	TG	401-1183-3	401-1183-14	401-1227-3	401-1227-10	401-1007-3	401-1007-10
Suspension	QG	N/A		N/A		N/A	
Deflector adjustor		401-1050-00		401-1050-00		401-1050-00	
Trough bracket		401-1182-00		401-1182-00		401-1101-0	
Delivery equipment		401-1222-00	401-1515-00	401-1362-00	401-1525-00	401-1104-00	401-1532-00
Set of troughs	SG	N/A	N/A	N/A	N/A	N/A	N/A
Set of troughs	DG	401-1435-00	401-1517-00	401-1435-00	401-1527-00	401-1435-00	401-1534-00
Set of troughs	TG						
Set of troughs	QG	N/A	N/A	N/A	N/A	N/A	N/A
Set of deflectors	SG	N/A	N/A	N/A	N/A	N/A	N/A
Set of deflectors	DG	401-1223-00	401-1516-00	401-1353-00	401-1526-00	401-1106-00	401-1533-00
Set of deflectors	TG						
Set of deflectors	QG						

Specifications are subject to change. Actual performance depends on specific application, container size, and line speed. Dimensions represent nominal machine size and are not for installation purposes.

Emhart Glass Worldwide Presence

Principal
Emhart Glass SA
Hinterbergstrasse 22
CH-6312 Steinhausen, Switzerland
Tel. +41 41 749 42 00 Fax +41 41 749 42 71

Leipzig Germany

Tel. +49 341 250773 20 Fax +49 341 250773 21

Savona Italy

Tel. +39 019 51 66 1 Fax +39 019 51 66 301

Kawasaki Japan

Tel. +81 44 222 7371 Fax +81 44 222 4868

Johor Bahru Malaysia

Tel. +607 859 0100 Fax +607 863 7717

Singapore

Tel. +65 6778 1466 Fax +65 6778 9433

China

Tel. +86 533 618 17 17 Fax +86 533 618 17 18

Örebro Sweden

Tel. +46 19 307 500 Fax +46 19 307 501

Sundsvall Sweden

Tel. +46 60 199 100 Fax +46 60 199 261

St. Petersburg FL USA

Tel. +1 727 471 1113 Fax +1 727 471 1290

Elmira NY USA

Tel. +1 607 735 2600 Fax +1 607 735 2601

Windsor CT USA

Tel. +1 860 298 7340 Fax +1 860 298 7395

Owensville MO USA

Tel. +1 573 437 2132 Fax +1 573 437 3146

Perrysburg OH USA

Tel. +1 567 336 7733 Fax +1 567 336 8727